
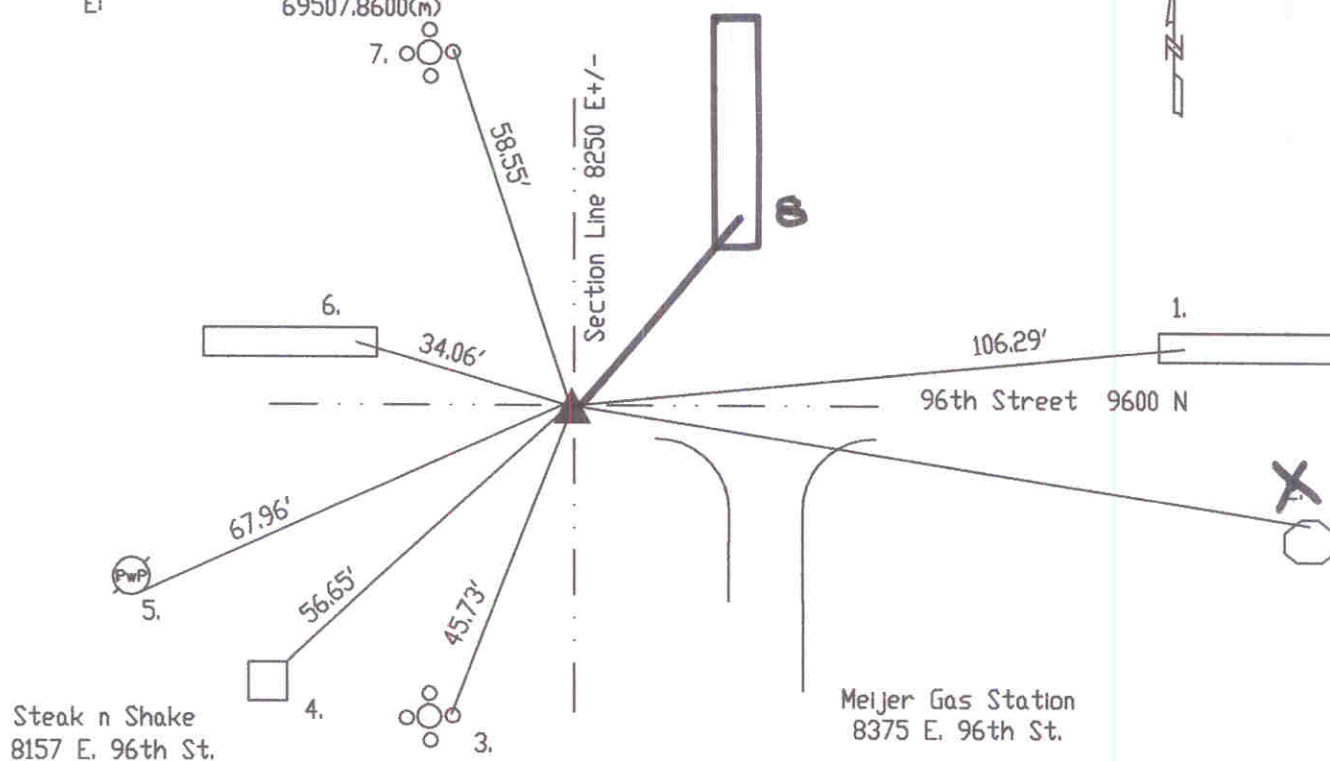


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 13 TOWNSHIP 17 RANGE 4  
DATE: -7-18-99-- 8-22-04  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-23-90

IN. S.P.C. E ZONE, NAD 83  
NAME: 17041302  
N: 519494.9520(m)  
E: 69507.8600(m)

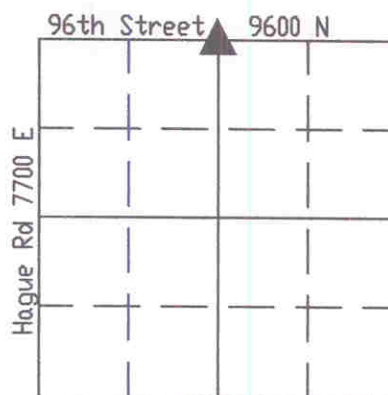

Original post set 1820 by Wm. B. Laughlin with witnesses: 14' beech S 18 E 13 links, 36' poplar S 47 W 13 links per Marion County Atlas pg. 12. Survey by Alexander Wilson 3-14&15-1854 called same trees except the poplar was now 40 inches in diameter per Lawrence Township Legal Survey Book, pg. 1. No mention was made concerning the type of monument set. Monroe tied the corner on 5-11-56 calling it a stone. 4-23-76 Wilcoxen called a stone 8' down. Cleveland 7-9-80 called a PK nail over stone. All recorded ties were destroyed during the developing in vicinity. Paul I. Cripe set a railroad spike by their previous references 4-1990. 4-23-90 excavated by Wilcoxen and large smooth flat stone was recovered from 17' down. The highest point of the stone was found to be 0.3' S and 0.2'E of the railroad spike set by Cripe. Corner of the stone was broken off and a Harrison was set. Re-tied 7-18-99 by Wilcoxen.

HC741302

REF.	DISTANCE	DESCRIPTION
1.	106.29'	Cut 'x' W-end in median
<del>2.</del>	<del>121.46'</del>	<del>Cut 'x' northerly side of 'octagon' aluminum pole 18'up</del>
3.	45.73'	Cut 'x' E-bolt of aluminum pole base
4.	56.65'	NE corner of concrete signal box base
5.	67.96'	Mag nail w/brass washer SE PwP#32-180B 8'up
6.	34.06'	Cut 'x' E-end in median
7.	58.55'	Cut 'x' E-bolt of aluminum pole base
8.	80.66'	Cut 'x' in median